


# MAXIBOX PLUS PERFORMANCE RANGE

OPERATING CHARACTERISTICS AT 50 Hz

MIDIBOX
~2850 [rpm]
ISO 9906
- Annex A

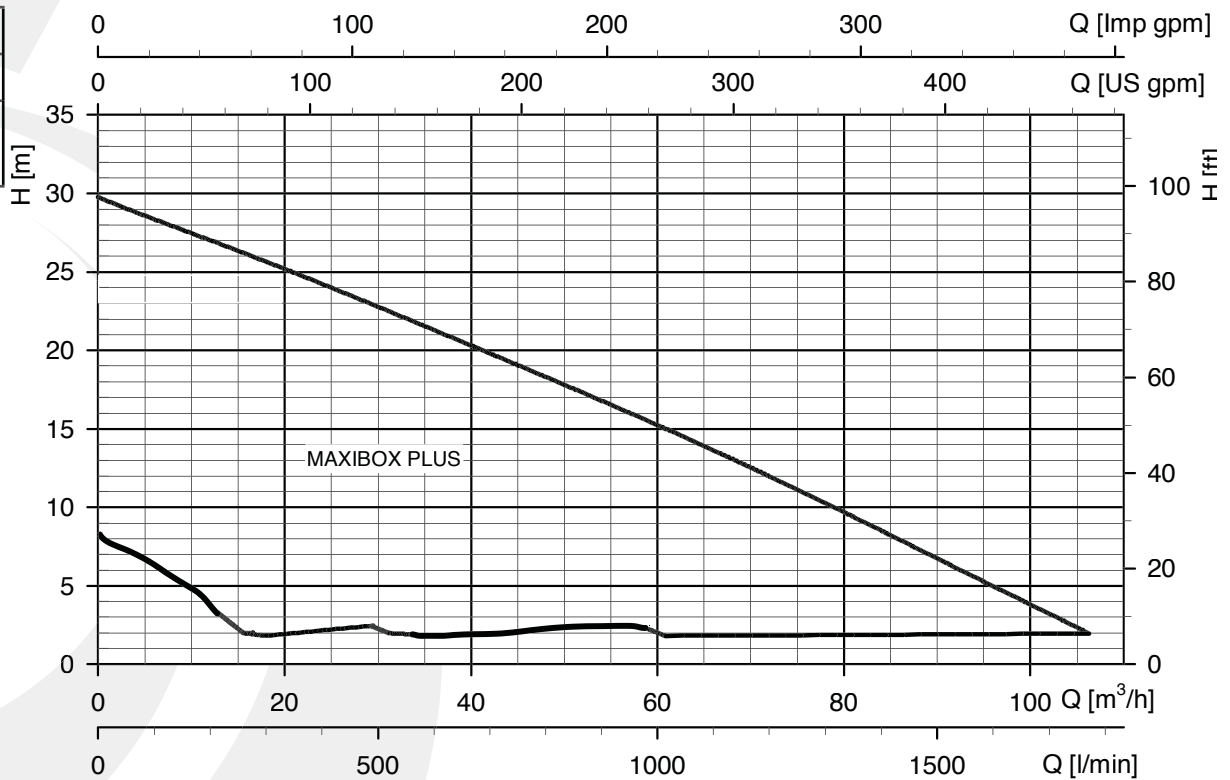

## Technicalities that matter

### Flexibility

Can be equipped with a wide range of pumps  
Flexible inlet position: to be drilled on site

### Easy maintenance and service

Screwed cover, lockable  
Easy pump maintenance thanks to the lowering devices

### Easy installation

Maxibox Plus is equipped with 2 lowering devices, complete of check valves and gate valves  
Extension available to protect the station against frost

### Safe and easy operation

Robust tank, made of polyethylene, resistant to ground pressure, water table, pressure and chemicals  
According to EN12050-1  
Self-cleaning tank bottom that ensures minimal sedimentation

### Pump range

	Maxibox Plus 13-50	Maxibox Plus 20-50	Maxibox Plus 20-65
DOMO	●	●	
DOMO GRI	●	●	
DL	●	●	
GLS DN 50	●	●	
GLS DN 65			●
GLV DN 50	●	●	
GLV DN 65			●