


MINIBOX SERIES

OPERATING CHARACTERISTICS AT 50 Hz

MINIBOX
~2850 [rpm]
ISO 9906
- Annex A

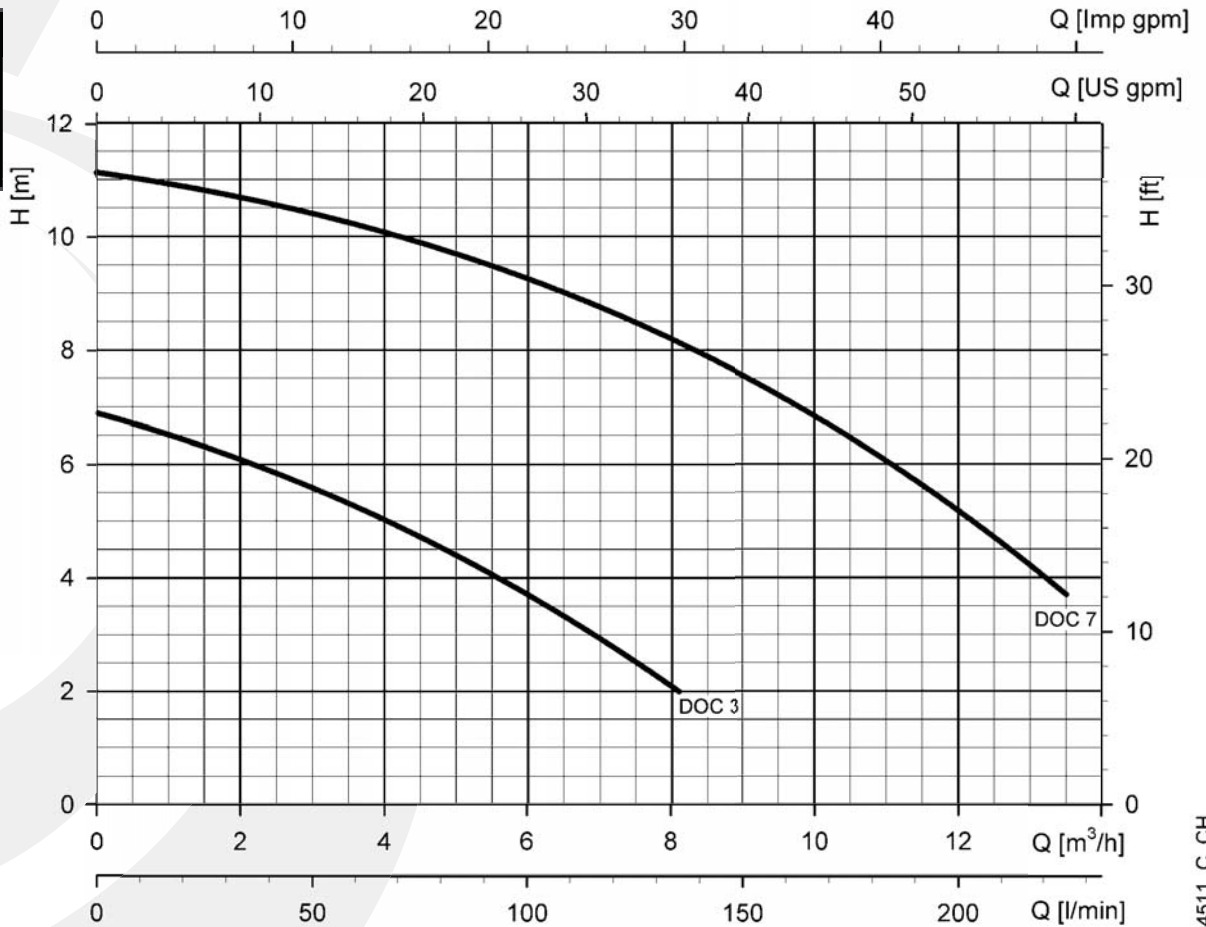

Hydraulic Performance Table

PUMP TYPE	RATED POWER		l/min m ³ /h	Q = DELIVERY								
	kW	HP		0	25	50	75	100	125	135	175	225
DOC3	0,25	0,33	6,9	6,3	5,6	4,7	3,7	2,5	2,0			
DOC7	0,55	0,75	11,1	10,8	10,4	9,9	9,3	8,5	8,1	6,5	3,7	

H = TOTAL HEAD METRES COLUMN OF WATER

These performances (referred to the single pump) are valid for liquids with density $\rho = 1,0 \text{ kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{s}$.

mbox_doc-2p50-en_b_th

Electrical Data Table

PUMP TYPE SINGLE-PHASE	ABSORBED POWER*		ABSORBED CURRENT*	CAPACITOR
	kW	220-240V	A	
DOC3	0,31	1,43	6,3	
DOC7	0,78	3,47	16	

PUMP TYPE THREE-PHASE	ABSORBED POWER*		ABSORBED CURRENT*	ABSORBED CURRENT*
	kW	220-240V	A	380-415V
-	-	-	-	-
-	-	-	-	-

*Maximum values within operating range.

mbox_doc-2p50-en_a_te