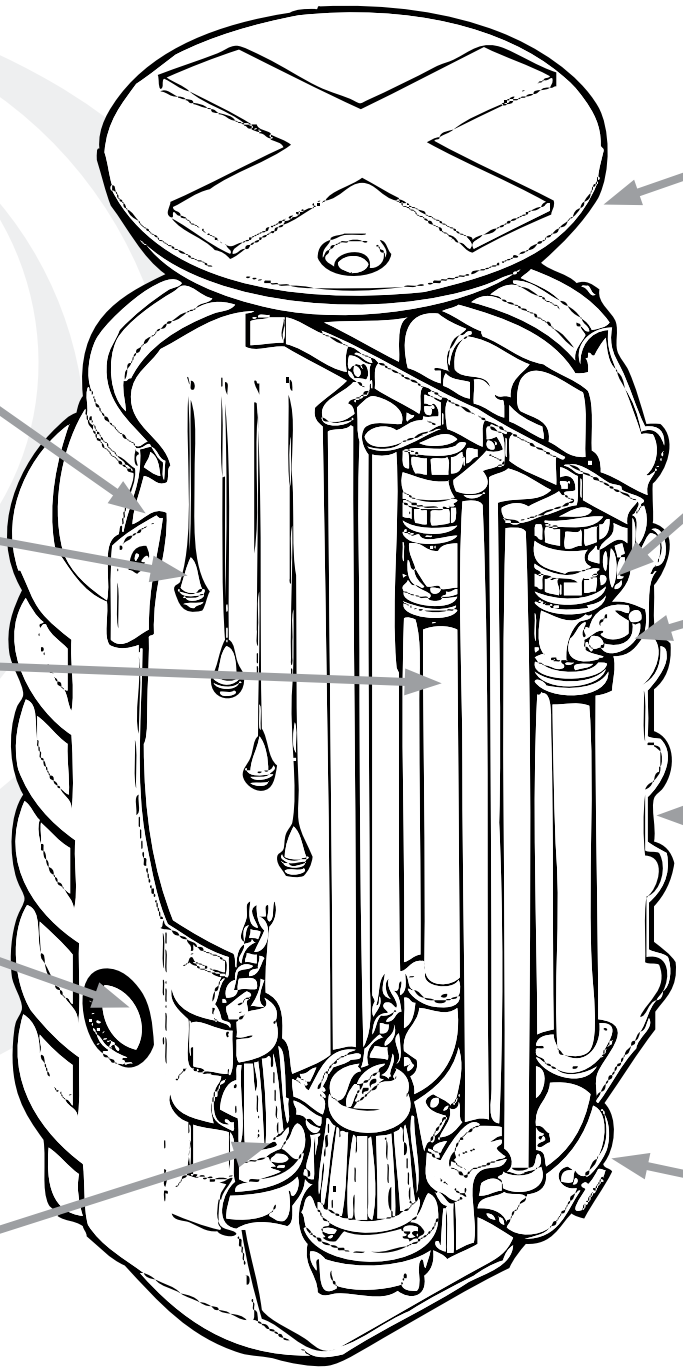
Lockable pedestrian access cover (sealed)
Two lifting eyes
Isolating gate valves
Floatswitches
Ball type non-return valves
Pipework
Reinforced rotomoulded polyethylene tank 100% watertight to prevent pollution according to EN12050
Flat surface for flexible inlet postion (110/160mm inlet to be fitted by customer)
Three support feet with anchor holes
Pumps